

VALENT VX

THE CONTRACTOR'S CHOICE FOR DOAS

Valent VX packaged rooftop units are designed to meet the requirements of high outdoor air applications and to be quick and easy to install.

SIMPLE START-UPS

AFFORDABLE QUALITY

SIMPLE START-UPS

MINIMIZE INSTALLATION RISK

Full factory run test ensures operation at start-up, and includes the following:

- All compressors are run to verify that operating pressures and temperatures are within specifications.
- Mechanical components are cycled through their entire range to ensure proper operation.
- Variable frequency drives are factory programmed.

Pre-configured controls shorten start-up; web screens make it easy.

- View all unit points on one screen with the web user interface, standard on every unit.
- Easily connect to BACnet MSTP, BACnet IP, or Modbus.
- Display refrigeration details on-screen that are typically gathered using gauges.

Three-step installation. Extensive factory testing and preconfigured controls allow quick installation:

- 1. Inspect.** Check integrity of curb/pad mounting, confirm utility connections, and ensure sensors are mounted and wired.
- 2. Enable** the unit from the keypad or web page.
- 3. Adjust** for local conditions. Modify set point defaults, adjust gas pressure, and tune cooling system.

Dedicated factory support

- We have a team of engineers providing support for installations, start-ups, and troubleshooting throughout the equipment's life cycle.

AFFORDABLE QUALITY


ROBUST AND COMPETITIVELY PRICED

- **Quality components in multiple configurations**, including inverter scroll compressors, ultra-quiet condenser fans, and up to 16:1 turndown gas furnaces.
- **Easy-to-maintain cabinets**, featuring 2" R-13 injected foam double-wall casings, multiple access doors, direct drive plenum fans, and space to properly maintain all components.

VALENT VX SPECIFICATIONS

	AIRFLOW		CAPACITY		COOLING TYPES	HEATING TYPES	ENERGY RECOVERY OPTIONS	
	Minimum (cfm)	Maximum (cfm)	Minimum (tons)	Maximum (tons)				
CASING SIZE	12	500	2,500	3	7	Packaged air cooled	Indirect gas fired Electric	Not available
	112	800	6,500	5	15	Packaged air cooled Air source heat pump Chilled water	Indirect gas fired Hot water Electric	Enthalpy wheel Enthalpy core
	212	2,250	9,500	15	30		Air source heat pump	Enthalpy wheel Enthalpy core
	312	3,750	16,000	25	50	Packaged air cooled Chilled water	Indirect gas fired Hot water Electric	Enthalpy wheel
	352	3,900	18,000	30	70			Enthalpy wheel Enthalpy core

Valent VX rooftop units are designed for quick and easy start-up. Quality components deliver reliable operation at a competitive price.

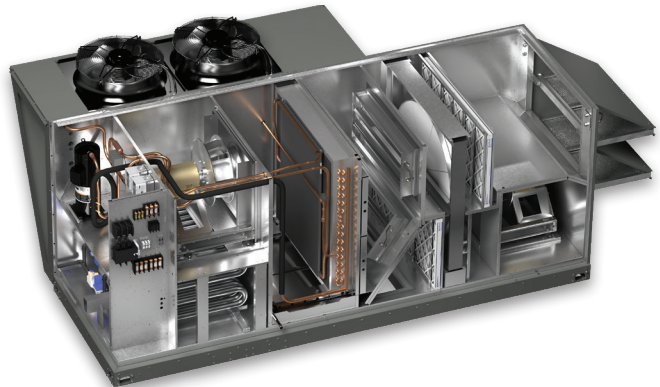

OUTDOOR AIR EXPERTS | ROBUST DESIGNS | DEDICATED SUPPORT

valentair.com

Valent VX Contractor BR 111522